

## RONGDACAIJING 49-inch Floor standing touch display digital Kiosk






### Features

- Fantastic picture quality, brilliant colors, clear and smooth playback
- IPS display, high-definition, wide viewing angle
- Diversified advertising display, supports multiple model
- Strong performance and lasting power
- HD tempered glass, aluminum alloy frame, rounded arc corner design
- Local offline layout, remote release, simple and convenient
- Cloud smart publishing is easier, computers and mobile phones are updated at any time
- Administrative authentic: support organization, user -defined management and Security: Secure data transmission & encrypt password by the RSA algorithm supported

### Multi screen model

- (Picture-In-Picture) feature gives a chance to compose up to 2 divided splitscreen on landscape or portrait display format. This gives great flexibility to users to allocate space for each content source
- High quality panel, industrial - grade design, full metal casing
- Platform Software: one PC can meet the access and management of at least 250 devices
- User: Online users:50 Registered user:1000

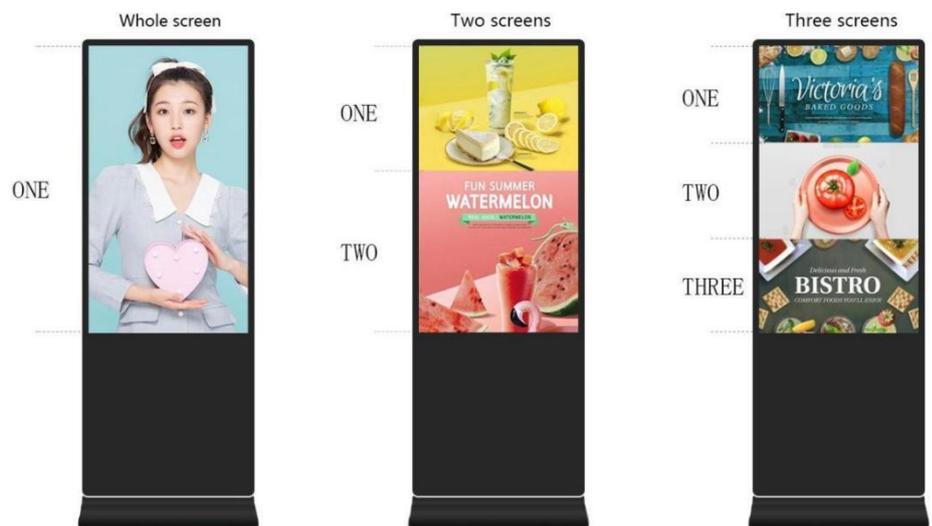




## Easy installation

### Step 1

Put the body on a flat place and insert the base into the bottom of the body

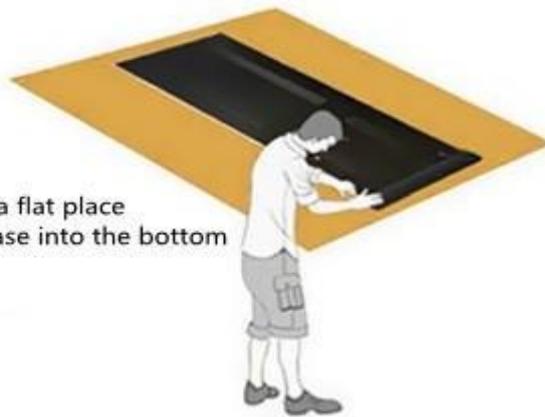

### Step 2

Install the screws, screw the screws into the screw holes, and confirm whether they are tightened



### Step 3

Erect the Kiosk



## Specification of 49-inch floor standing touch screen digital Kiosk

Item	Name	RONGDACAIJING 49-inch floor standing touch screen kiosk
	Model	RC-49THS
Motherboard	OS	Android
	CPU	Quad-core Cortex-A17 1.8GHz
	RAM	2GB
	HDD	16GB
	Network	RJ45 / WiFi 2.4G /( Bluetooth/ Extendable 4G optional)
	Interface	(Peripherals)USB2.0×2、HDMI×1、RJ45×1
	LAN(internet)	100M/1000M self-adaptive
LCD	LCD panel	Brand new LG/ AUO/ BOE LCD panel
	Back light	LED
	Display area(mm)	1073*604
	Display ratio	16:9
	Brightness	320cd/m <sup>2</sup>
	Contrast	1200: 1
	Viewing angle	178°(V)/ 178°(H)
	Color gamut	1.07B (10Bits)
	Resolution	3840*2160 4K
	Decoding capacity	1CH@4k 4ch@1080
	Response time	8ms
	Touch screen	IR Multiple-point touch screen 10 touch
Support format	OS Version	Android 9
	Language	Multi-language
	Video formats	RM/RMVB, MKV, TS, FLV, AVI, VOB, MOV, WMV, MP4
	Audio formats	MP3, WMA, WAV, AC3, FLAC
	Image formats	BMP/PNG/GIF/JPEG
	Other	PDF、PPT、SWF text、Real-time data stream
	System management	Unified management, group management, multi-user management, remote management, timing switch
Body	Body color	Black + silver/custom
	Body size	1856*673*38
	Material	Toughened glass + sheet metal + aluminum profiles
	Installation	Floor standing
	Tempered	3mm
	Logo	Customized
	Power supply	AC100-240V (2.0A) 50/60Hz
	Consumption(typically)	≤120W
	Consumption(Standby)	≤0.5W
	Refresh rate	60HZ
	Life span ( hrs )	≥60,000hrs

Others	Working time	7x16h
	Working emperature	0~40℃ (32° F- 104° F)
	Storage temperature	-20~60℃
	Working humidity	10% ~ 85%
	Store humidity	5% ~ 85%
	Warranty	1 year
Packaging	Paper box(MM)	1900*805*160
	Net W./Gross W.(Kg)	41.6KG/48.2KG

Office address: Room 09, 7th Floor, Jingting Building, Dongzhou Community, Guangming Street district, Guangming District, Shenzhen

Factory address: 8th Floor, A Unit, 1st B, Guancheng sanliang intelligence industrial park, Chuangxing Road, Xingguang village, Huangjiang Town, Dongguan City, Guangdong Province China